

Tools

for installing coaxial and optical systems



braun teleCom products have stood for competence and continuity for more than 35 years. Extensive experience and constantly growing know-how make the components and systems an integral part of many FTTH and HFC broadband networks.

While, in many areas, our activities focus on the development and production of our own products, we also serve as distributor for selected high-performance partners to achieve best possible customer satisfaction.

braun teleCom is a product brand of Netceed. We are a global leader in distribution, logistics, technical engineering, and product design with over 30 years of expertise and performance supporting the telecommunications and broadband industry.

Netceed is a global leader in distribution, logistics, technical engineering, and product design supporting the telecommunications and broadband industry. We supply and distribute a comprehensive range of passive and active equipment and tooling for network deployment, upgrades, and maintenance, supporting all technologies including FTTH, FTTx, HFC, Wi-Fi, 5G/mobile, and data center.

Netceed's comprehensive portfolio of 90,000+ products from nearly 1,500 industry-leading suppliers, along with their value-added supply chain solutions support carriers' seamless delivery of high-speed Internet, Video, Data, and Voice services to Residential, Business, and Mobile Users.



CONTENT

1. COAXIAL TECHNOLOGY

2. CABINETS AND ACCESSORIES FOR POWER SUPPLY

3. OPTICAL SYSTEMS

4. TOOLS

Tools for installing coaxial systems 3

Mechanical tools4

Broadband cable stripping tools9

Measuring device OneExpert CATV10

Tools for installing optical systems 13

Fiber cleavers14

Splicing devices15

Mechanical tools16

Cleaning accessories20

Mobile label printers 21

BMP5122

BMP6123

5. CLICK & GO

6. AUTHORIZED DISTRIBUTION

TOOLS FOR INSTALLING COAXIAL SYSTEMS

Do you have questions concerning our products or want to place an order?

We look forward to your call!
+49 511 757086

Do you already know, which products you need?
shop.brauntelecom.com

Mechanical tools








for coaxial systems



55240100
Mounting handle for
connector 5/8 MU-RG11-CX3 7,5

55240700
Mounting handle for F-connectors
GF-UE-ULTRAEASE

55240600
Mounting handle for
connectors 3,5/12M-RG11-CX3


| Item | Description | Order No. |
|---|--|-----------------|
|  | CC security tool for CC security shield Specialty tool for installing or removing the CC security shield (Order No. 54440000) | 55445000 |
|  | Locking termination tool LTT-75 for CC-LT-R75 Special locking tool for terminator CC-LT-R75 | 55281000 |
|  | F-connector crimp handle Work aid with F-thread and plastic handle for comfortable working, suitable for every F-connector | 55240000 |
|  | Mounting handle for connectors 5/8 MU-RG11-CX3 7,5 Work aid with plastic handle for a comfortable mounting of the 5/8 MU-CX3 connector | 55240100 |
|  | Mounting handle for connectors IEC14M-RG11-CX3 7,5 Work aid with plastic handle for a comfortable mounting of the IEC14M-CX3 connector | 55240400 |
|  | Mounting handle for connectors 3,5/12M-RG11-CX3 Work aid with plastic handle for a comfortable mounting of the 3,5/12M-CX3 connector | 55240600 |
|  | Mounting handle for F-connectors GF-UE-ULTRAEASE Work aid with plastic handle for a comfortable mounting of the F-compression connectors GF-UE-6 (5,1) and GF-UE 4,9 | 55240700 |

Subject to technical changes!

55511500
Mounting tool
RTF 716-3,8L

55470000
Torque wrench
TW 307-AH-B

55490000
Torque wrench
TW 407 AH

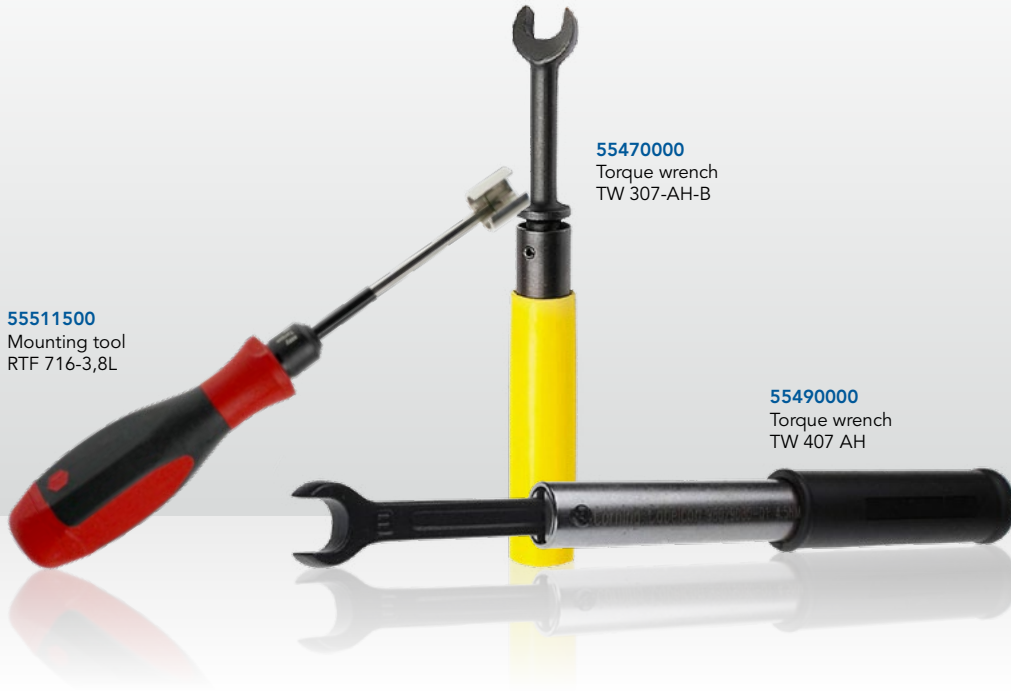

| Item | Description | Order No. |
|---|--|-----------------|
|  | Torque wrench TW 307-AH-B Tool to tighten the nut of F-connectors complying with torque standard of 3,4 Nm, suitable for all F-connectors with nut-size HEX 11 | 55470000 |
|  | Torque wrench TW 407 AH Tool to tighten the nut of F-connectors complying with torque standard of 4,5 Nm, suitable for all F-connectors with nut-size HEX 11 | 55490000 |
|  | Torque wrench TW 409 Tool to tighten the nut of F-connectors complying with torque standard of 4,5 Nm, suitable for all F-connectors with nut-size HEX 14 | 55510000 |
|  | Mounting tool HT-2206F Mounting tool to fix the F-nuts of F-cripp and F-CX3 compression connectors with nut-size HEX 11 onto F-females | 55515200 |
|  | Mounting tool RTF 716-3,8L Mounting tool to fix F-cripp and F-compression connectors | 55511500 |
|  | Rubber tool for cable support Cable holder made of flexible rubber for strong hold of the coax cable during F-connector mounting, useable for cables with 3 – 12 mm diameter | 55240500 |
|  | CRP 106C-.262"+.324" Crimp tool for F-60-Mini Tool for F-60-Mini 3,2 / 5,6 (= .262" connector) as well as for all F-59-ALM ... and F-56-ALM ... (= .324" connectors) | 55210000 |



55415300
POCKET
Compression tool CX3



55415500
Compression tool
CX3 universal

| Item | Description | Order No. | |
|------|--|---|-----------------|
| | CRP 106J-.360"+.475" Crimp tool for EPA | Tool for 3,5/12M-56-UNIV..., IEC14M-56-UNIV... and F-56-EPA... (= .360" connectors) as well as for 3,5/12M -RG11-EPA..., IEC14M-RG11-EPA..., 5/8MU-RG11-EPA..., FM-RG11-ALM... and FM-COAX6-ALM... (= .475" connectors) | 55215000 |
| | CRP 106H-.324"+.360" Professional crimp tool | Tool for all F-59-ALM... and F-56-ALM... (= .324" connectors) as well as for 3,5/12M-56-UNIV..., IEC14M-56-UNIV... and F-56-EPA... (= .360" connectors) | 55220000 |
| | CRP 106F-.324"+.475" Professional crimp tool | Tool for all F-59-ALM... and F-56-ALM... (= .324" connectors) as well as for 3,5/12M-RG11-EPA..., IEC14M-RG11-EPA..., 5/8MU-RG11-EPA..., FM-RG11-ALM... and FM-COAX6-ALM... (= .475" connectors) | 55230000 |
| | CAT-EX 59/6 compression tool | Tool for PPC compression connectors EX-59, EX-6, CMP MC 30 and CMP MC 37 | 55400000 |
| | CAT-AS-IEC/F-FX Compression tool | Tool for compression connectors F-59-CX3..., F-56-CX3..., FM-RG11-CX3..., IECF-56-CX3... and IECM-56-CX3... | 55410100 |
| | POCKET Compression tool CX3 | Tool for Cabelcon CX3 compression connectors F-59-CX3..., F-56-CX3..., IECF-56-CX3, IECM-56-CX3... and GF-UE ULTRA | 55415300 |
| | Compression tool CX3 universal | Tool for the Cabelcon compression connectors F-, BNC- and IEC- in all dimensions (for coax cable types RG59/RG6/RG7/RG11) | 55415500 |
| | Compression tool CX3 multimedia | CX3 compression tool Multimedia for Fm-60, F-56, IECm-59+60, IECF-59+56 and BNCm-60 | 55415600 |

Subject to technical changes!



55294000
Rotary cable stripper
for Minicables



55295205
Cable shears
RG6/RG59/PRG11



**Compression tool RG11
universal**

Compression tool RG11 Universal for RG11-CX3 7,5

55415700



**Rotary cable stripper for
Minicable, RG 6, RG 58,
RG 59**

Allround cable stripper for stripping of cable types H123, H123B, H121, H121B, BTC 1000/26, BTV 1000/20, BTC 1000/20 Cu and BKS 2050/30 with stripping lengths of 6,5 mm for each the inner conductor and the braid (for crimp types ALM, UNIV, EPA and MINI)

55294000



Cable stripper RG 11

Cable stripper for cable types PRG 11 Cu, PRG 11 DB+ and BKU 1000/13 with 2 adjustable blades

55295000



**Cable stripper for
RG6/59 w/ HEX 11
spanner**

Cable stripper for cable types RG 6/59 with spanner fits for HEX 11 F-connectors

55295003



**Cable stripper CSS-5127,
RG59 & RG6**

Cable stripper for RG59 and RG6 cable types with stripping lengths of 12 mm (outer conductor) and 7 mm (inner conductor), suitable for the 2 port multimedia outlets btv-MMD-5xx-y

55295007



**Replacement blades
CSS-110**

Replacement blades for the cable stripper CSS-5127 with stripping lengths of 12 mm (outer conductor) and 7 mm (inner conductor), suitable for the 2 port multimedia outlets btv-MMD-5xx-y

55295008



**Cable shears
RG6/RG59/PRG11**

Cable shears for coaxial cables with an outer diameter of max. 10,2 mm

55295205



Cable shears JIC-750

Cable shears for coaxial cables with an outer diameter of max. 19,05 mm

55295204








55295201
Cable shears JIC-755



55299500
Dual stripping tool for
corrugated cables



55515500
RPT cable checker

| Item | Description | Order No. |
|---|---|-----------------|
|  | Cable shears CXC-1 Cable shears for coaxial cables with an outer diameter of max. 25,4 mm | 55295200 |
|  | Cable shears JIC-755 Cable shears for coaxial cables with an outer diameter of max. 25,4 mm | 55295201 |
|  | Perfect stripping of jacket, outer- and inner conductor in one step with high accuracy according to the stripping directions for each connector size. Only for Cabelcon connectors! | |
| | Stripping tool for iKx | 55295500 |
| | Stripping tool for nKx | 55296000 |
| | Stripping tool for qKx | 55297000 |
| | Stripping tool for sKx | 55297500 |
|  | Specially designed for connection cables of the in-ground tap-off type Kabelmetall Cellflex HFC 1/2" Cu2Y. Perfect stripping of jacket, outer and inner conductor in one step with high accuracy according to the stripping directions of the 3,5/12f-C418 connector. | 55299500 |
| | Dual stripping tool for trunk coax cables Perfect stripping of jacket, outer- and inner conductor in one step with high accuracy according to the stripping directions for each connector size. Only for Cabelcon connectors! | |
| | Stripping tool for COAX 4 | 55298000 |
| | Stripping tool for COAX 3 | 55299000 |
|  | RPT cable checker For connection testing with optical and sound alert | 55515500 |

Subject to technical changes!

Broadband cable stripping tools

for i-n-q-s Kx KES connector systems



55295800
iKx



55296500
nKx



55297300
qKx



55297700
sKx

- Universal tool for controlled and safe removal of the outer jacket, cutting the outer conductor as well as deburring the inner conductor
- Stripping dimensions, adjustable at iKx and nKx tools (coax-cable termination box 30 mm or 45 mm KES connectors)

- Available in a convenient field case, a bag (usable with belt) or as single units
- Simplified and error-reduced handling due to the preset stripping dimensions

Stripping tool set in a suitcase

| Item | Order No. |
|---|-----------------|
| Stripping tool set iKx, nK and qKx, without replacement blades | 55297400 |
| Stripping tool set iKx, nKx and qKx, with one of each type replacement blades | 55297402 |
| Stripping tool set iKx, nKx, qKx, and sKx, without replacement blades | 55297800 |
| Stripping tool set iKx, nKx, qKx, and sKx, with replacement blade for each type | 55297801 |

Accessories and parts

| Item | Order No. |
|---|-----------------|
| Replacement blade for iKx, nKx, qKx or sKx oversheath | 55299004 |
| Replacement blade for iKx, nKx, qKx dielectric | 55299005 |
| Replacement blade for sKx dielectric | 55299006 |
| Blade box small for 10 blades, blades not included | 55299008 |
| Blade box large for 10 blades, blades not included | 55299009 |
| Bag for 3 stripping tools (fig. bottom left) | 55297815 |
| Case for 4 stripping tools (fig. bottom right) | 55297817 |

Stripping tool as single unit

| Item | Order No. |
|-------------------------------|-----------------|
| Stripping tool for iKx cables | 55295800 |
| Stripping tool for nKx cables | 55296500 |
| Stripping tool for qKx cables | 55297300 |
| Stripping tool for sKx cables | 55297700 |



Measuring device OneExpert CATV



OneExpert CATV
Frontal view



OneExpert CATV
Side view

The Viavi One Expert CATV helps technicians to fix disruptions as quickly as possible. The user-friendly multi-touch user interface and the automatic OneCheck™ tests make it easy to perform complex measurements due to a clear dashboard display with expressive results. In addition, the future-proof modularity provides years of support in the installation of CATV and home networks. Below you can find a selection of the OneExpert's most important features:

- Broadband measurements in record time
- Simplifies and speeds up test execution
- Reduces subsequent work
- Enables toe operator to recognize mistakes at a glance
- Highest screening against LTE due to aluminium housing
- Measurement of the whole frequency range in less than 2 minutes while automatically detecting the channel plan
- Options for 32 x 8 DOCSIS® 3.0, DOCSIS® 3.1, WiFi, 1-Gigabit-Ethernet and TrueSpeed™
- RF/DOCSIS® module swappable on-site
- Ready for WiFi 2,4/5 GHz, Bluetooth, StrataSync™
- Simultaneous ingress and downstream tests
- Troubleshooting of QAM carriers/home networks
- WLAN inspection within 2,4 GHz and 5 GHz networks
- Testing of Gigabit DOCSIS® services
- Install PON(RFoG networks, checking fiber endfaces and determining the optical power level as well as the RF performance
- Optional IP video tests

OneCheck Expert

Expert mode enables the use of configured test point compensations and specific limit plans. The operator has the possibility to define own OneCheck tests. Downstream, as well as DOCSIS test can be configured here.

Smart Access Anywhere (SAA)

Smart Access Anywhere (SAA) allows remote access to the OneExpert CATV (ONX-630) without being on the same local network. Remote access is useful for remote coaching, troubleshooting and training.

Sweeping

Compatible with SDA 5500/5510/5000 as well as SCU 1800 sweeping systems of Viavi Solutions.

TDR (Time-Domain Reflectometer)

Simple network analysis and cable length tests via reflection measurement.

Template management

You now have the option to manage different templates on your device. This allows to quickly choose between different configurations.



OneExpert CATV
Accessories

| Parameter | ONX 620 | | | ONX 620 special models | | ONX 630 | |
|--|---------|------|------|------------------------|--------|---------|------|
| | Base | IPX | TSX | TSX VFKD | TSX UM | NTX | SWX |
| Optionen | | | | | | | |
| DOCSIS® 3.1 | | opt. | | ● | opt. | | ● |
| DOCSIS® 3.0 Bonding - 32x8 | | ● | | ● | ● | | ● |
| TrueSpeed (via GBE interface) | | opt. | | opt. | opt. | | opt. |
| IP video | | opt. | | opt. | opt. | | opt. |
| VoIP (ethernet) | | opt. | | opt. | opt. | | ● |
| VoIP MOS (requires the VoIP option) | | opt. | | opt. | opt. | | opt. |
| Home TDR | | opt. | | opt. | opt. | | opt. |
| HL Leakage | | opt. | | opt. | opt. | | opt. |
| Field view | | opt. | | opt. | opt. | | opt. |
| Field view with reverse path signal generator (RSG) | | opt. | | opt. | opt. | | opt. |
| Smart Access Anywhere (SAA) | | opt. | | opt. | opt. | | opt. |
| OneCheck | | | | | | | |
| OneCheck: Dashboard | ● | ● | ● | ● | ● | ● | ● |
| OneCheck: Downstream full scan (level; MER; BER; C/N; echo; GD; ICR) | ● | ● | ● | ● | ● | ● | ● |
| OneCheck: Incline | ● | ● | ● | ● | ● | ● | ● |
| OneCheck: Downstream ingress under carrier | ● | ● | ● | ● | ● | ● | ● |
| OneCheck: SmartScan/MER & BER diagrams (bar chart for all channels) | – | – | ● | ● | ● | ● | ● |
| OneCheck DOCSIS: Scan (level; MER; BER; C/N; echo; GD; ICR) | ● | ● | ● | ● | ● | ● | ● |
| OneCheck DOCSIS: Upstream scan TX level; modulation; ICR | ● | ● | ● | ● | ● | ● | ● |
| OneCheck DOCSIS: Throughput & package quality | – | – | ● | ● | ● | ● | ● |
| SessionExpert: SmartScan comparison of TAP, termination box and CPE | – | – | ● | ● | ● | ● | ● |
| SessionExpert: Detailed DOCSIS® service test comparison | – | ● | ● | ● | ● | ● | ● |
| SessionExpert: Any other test | ● | ● | ● | ● | ● | ● | ● |
| Channel inspection | | | | | | | |
| ChannelCheck: Level/MER/BER over time, OFDM MER variation | – | – | ● | ● | ● | ● | ● |
| DQI over time | ● | ● | ● | ● | ● | ● | ● |
| Channel performance diagram, downstream (ICFE) | – | – | ● | ● | ● | ● | ● |
| SmartScan™ | – | – | ● | ● | ● | ● | ● |
| Downstream spectrum with ingress under carrier | – | – | ● | ● | ● | ● | ● |
| ChannelCheck: Full scan (Level; MER; BER; C/N; Echo; GD; ICR) | ● | ● | ● | ● | ● | ● | ● |
| ChannelCheck: Constellation/incline/system display | ● | ● | ● | ● | ● | ● | ● |
| DOCSIS® inspection | | | | | | | |
| DOCSISCheck: Level/MER/BER with ES/SES over time | – | – | ● | ● | ● | ● | ● |
| Channel performance diagram, downstream (ICFE) | – | – | ● | ● | ● | ● | ● |
| DOCSISCheck: DOCSIS channel scan: TX level; modulation type; ICFR | – | – | ● | ● | ● | ● | ● |
| Downstream spectrum with ingress under carrier | – | – | ● | ● | ● | ● | ● |
| DOCSIS® channel frequency performance diagramm, upstream | – | – | ● | ● | ● | ● | ● |
| Throughput/package quality/traceroute/ping | – | ● | ● | ● | ● | ● | ● |
| Modem function (pass through at RJ-45 GB ethernet port) | – | ● | ● | ● | ● | ● | ● |
| Any other DOCSIS® test (DQI + TX level over time; channel scan, downstream level, MER, BER, C/N, Echo, GD, ICR (ICFR), OFDM MER variation) | ● | ● | ● | ● | ● | ● | ● |
| Further functions | | | | | | | |
| Ingress interference radiation scan | ● | ● | ● | ● | ● | ● | ● |
| Spektrum (forward path) | ● | ● | ● | ● | ● | ● | ● |
| Quick test | ● | ● | ● | ● | ● | ● | ● |
| Ethernet (speed test; ping/traceroute; FTP/HTTP upload/download) | – | ● | ● | ● | ● | ● | ● |
| WiFi – 2,4 & 5 GHz: SSID overview: Diagramm and table; SSID level over time | ● | ● | ● | ● | ● | ● | ● |
| Integration of the mobile app | ● | ● | ● | ● | ● | ● | ● |
| Support of optical fiber microscopes P5000i & opt. level meters: MP-60, MP-80 | ● | ● | ● | ● | ● | ● | ● |
| Support of SmartID and SmartID Plus | ● | ● | ● | ● | ● | ● | ● |
| Network incl. test point compensation (TPC) | | | | | | | |
| Ingress Expert | opt. | opt. | opt. | ● | ● | ● | ● |
| DOCSIS Expert | opt. | opt. | opt. | ● | ● | ● | ● |
| Channel Expert | opt. | opt. | opt. | ● | ● | ● | ● |
| Full Scan/QuickCheck Expert | opt. | opt. | opt. | ● | ● | ● | ● |
| OneCheck Expert | opt. | opt. | opt. | ● | ● | ● | ● |
| Return Signal Generator | opt. | opt. | opt. | opt. | opt. | ● | ● |
| RSG Loopback | opt. | opt. | opt. | opt. | opt. | ● | ● |
| Sweeping | | | | | | | |
| Sweeping without wobble point | – | – | – | – | – | ● | ● |
| Forward sweeping | – | – | – | – | – | opt. | ● |
| Reverse sweeping | – | – | – | – | – | opt. | ● |
| Reverse Alignment | – | – | – | – | – | opt. | ● |
| Order No. | | | | | | | |

on request



TOOLS FOR INSTALLING OPTICAL SYSTEMS

Do you have questions concerning our products or want to place an order?

We look forward to your call!
+49 511 757086

Do you already know, which products you need?
shop.brauntelecom.com

Fiber cleavers



Fiber Cleaver V8
Order No. on request



The Cleavers V7, V7+ and V8 are fully automatic cleaving tools for 250 µm, 900 µm, flat ribbon and 2 – 12 fiber ribbon cables. The fully automatic cleaving tools enable fast and precise breaking of the fibers. With the devices V7+ and V8, the fiber remains are automatically collected in a waste disposal. The V8 is characterized by the fact that the breaking process is carried out in just one step.

- Easy operation, including fiber waste disposal (V7+ & V8)
- Universal fiber holder
- Blade with 16 positions (up to 48.000 cleaves)
- Compact and robust
- Automatic resetting
- Cleaving process in a single step (V8)

| Parameter | Fiber Cleaver V7 | Fiber Cleaver V7+ | Fiber Cleaver V8 |
|-----------------------|--|---------------------------|---------------------------|
| Fiber type | single fiber/fiber ribbon | single fiber/fiber ribbon | single fiber/fiber ribbon |
| Length [mm] | 8 – 20 | 8 – 20 | 8 – 20 |
| Cleaving angle | < 0,5° (single) | < 0,5° (single) | < 0,5° (single) |
| Lifespan of the blade | 48.000 | 48.000 | 48.000 |
| Work steps | 2 | 2 | 1 |
| Reset function | blade setback | blade setback | blade setback |
| Fiber holder | universal | universal | universal |
| Applicable fibers | 250 µm, 900 µm, 3 mm flat ribbon- and jumper | | |
| Fiber waste disposal | no | yes | yes |
| Order No. | on request | on request | on request |



Splicing devices



View 7
Order No. on request

Splicing devices with jacket-centering

The fully automatic, jacket-centering and compact splicers View 1 and View 3 with active V-groove, 5"/4,3" high-res double-tapping LCD touch display and GUI create large and clear fiber images. Additionally, 3 LEDs enable easy working, even in dark environments.

- Active V-groove jack-centering
- Highest zoom and resolution
- 5"/4,3" (View 1) colored touch display
- Lighting with 3 LEDs
- Removable SOC fiber holder
- Protection against water, shock and dust

3 axis splicing device with core-centering (DACAS)

The fully automatic, core-centering splicers View 5, View 6 and View 7 use their 5" high-res LCD touch display to create large and clear fiber images. The devices enable a SOC (Splice-on-Connector) splicing. Furthermore, the View 6s features splicing of DIAMOND Alberino Splice-On-Connectors. Due to short splicing and heating times, the devices offer the highest efficiency possible and are therefore applicable even in demanding environments.

- Highest zoom and resolution
- 5" colored touch display
- Lighting with 3 LEDs
- Short heating time
- Splicing of DIAMOND Alberino Splice-On-Connectors
- Protection against water, shock and dust

| Parameter | View 7 | View 6s | View 5 | View 3 | View 1 |
|--------------------------------------|---|--|--|--|---|
| Dimensions [mm] | 160 x 133 x 155 | 152 x 147 x 175 | 147 x 130 x 155 | 143 x 130 x 155 | 137 x 132 x 126 |
| Weight with/-out battery [kg] | 2,8/2,17 | 2,43/2,07 | 2,21/1,85 | 2,31/1,95 | 1,7/1,45 |
| Fiber count | single | single | single | single | single |
| Applicable fibers | SM (ITU-T G.652 & G.657)/MM (ITU-T G.651)/DS (ITU-T G.653)/NZDS (ITU-T G.655) | | | | |
| Compatible fibers [mm] | 0,25 – 3,00/indoor cables (VFH-40) | | | | |
| Cleaving length [mm] | Ø 0,125 – 1, L 8 – 16 | Ø 0,125 – 1, L 5 – 16 | Ø 0,125 – 1, L 8 – 16 | Ø 0,125 – 1, L 8 – 16 | Ø 0,125 – 1, L 8 – 16 |
| Sheath diameter [µm] | 80 – 150 | 80 – 150 | 80 – 150 | 80 – 150 | 80 – 150 |
| Splicing programs | max. 128 | max. 128 | max. 128 | max. 128 | max. 128 |
| Heating programs | max. 32 | max. 32 | max. 32 | max. 32 | max. 32 |
| Typ. splice loss | SM: 0,02 dB/MM; 0,01 dB/ DS/NZDS: 0,04 dB/ G.657: 0,02 dB (ITU-T standard) | | | SM: 0,03 dB/MM; 0,02 dB/ DS/NZDS: 0,04 dB/ G.657: 0,03 dB (ITU-T standard) | |
| Return loss [dB] | > 60 | > 60 | > 60 | > 60 | > 60 |
| Splicing time | 7 s/SM: 8 s | 7s/SM: 9 s | 7s/SM: 9 s | 7s/SM: 9 s | 7s/SM: 9 s |
| Heat shrink splice length [mm] | 20 – 60 mm | 20 – 60 mm | 20 – 60 mm | 20 – 60 mm | 20 – 60 mm |
| Heating time | FP-03 typ. 13 s | FP-03 typ. 13 s | FP-03 typ. 13 s | FP-03 typ. 30 s | typ. 13 s |
| Results memory | latest 2.000 | latest 2.000 | latest 2.000 | latest 2.000 | latest 2.000 |
| Tensile test | 1,96 – 2,25 N | 1,96 – 2,25 N | 1,96 – 2,25 N | 1,96 – 2,25 N | 1,96 – 2,25 N |
| Operating conditions | 0 – 5000 m above sea level/0 – 95 % rel. humidity/-10 to +50 °C/wind 15 m/s | | | | |
| Storage conditions | 0 – 95 % rel. humidity/-40 to +80 °C | | | | |
| Power supply | AC input 100 – 240 V/DC input 9 – 14 V | | | | |
| Splicing amount/heating with battery | 9800 mAh battery capacity/typ. 355 splice-heat-cycles | 4200 mAh Batteriekapazität/typ. 170 splice-heat-cycles | 4200 mAh Batteriekapazität/typ. 170 splice-heat-cycles | 4200 mAh Batteriekapazität/typ. 170 splice-heat-cycles | 3800 mAh Batteriekapazität/ typ. 140 splice-heat-cycles |
| Aut. calibration | Automatic arc calibration at change of air pressure or temperature | | | | |
| Electrode life span | Up to 3.500 arcs (increase possibly via electrode grinding device) | | | | |
| Connections | USB 2.0/Mini USB | USB 2.0/Mini USB | USB 2.0/Mini USB | USB 2.0/Mini USB | Micro HDMI |
| Order No. | on request | on request | on request | on request | on request |

Mechanical tools

for optical systems



55680129
CSR-1575



55680125
JIC-125

| Item | Description | Order No. |
|---|---|-----------|
|  | JIC-125 Fiber stripping tool 250 to 125 µm | 55680125 |
|  | JIC-375 3-way fiber stripping tool Sheath 1,6 – 3 mm Buffer 900 to 250 µm Coating 250 to 125 µm | 55680127 |
|  | CSR-1575 Tool for stripping the cable sheath and scratching fiber tubes | 55680129 |
|  | JIC-186 Kevlar shears | 55680130 |
| | Tool for cutting tubes | |
|  | JIC-1022 0,6 mm; 0,8 mm; 1,0 mm; 1,3 mm; 1,6 mm; 2,0 mm; 2,6 mm | 55680132 |
| | JIC-1626 0,4 mm; 0,5 mm; 0,65 mm; 0,8 mm; 1,0 mm; 1,3 mm | 55680134 |
| | JIC-2030 0,25 mm; 0,32 mm; 0,4 mm; 0,5 mm; 0,6 mm; 0,8 mm | 55680136 |

Subject to technical changes!



55680138
CST-1900

55680146
VFL-25



| Item | Description | Order No. |
|----------|--|-----------|
| CST-1900 | Cable sheath stripping tool (4,5 – 29 mm) cuts radially – in the longitudinal direction and spiraling | 55680138 |
| MS-6 | Mid span access tool 1,2 – 1,5 mm; 1,5 – 1,8 mm; 1,8 – 2,1 mm; 2,1 – 2,5 mm; 2,5 – 2,9 mm; 2,9 – 3,3 mm | 55680140 |
| MS-26 | Mid span access tool 2,9 – 3,6 mm; 3,6 – 4,4 mm; 4,4 – 5,2 mm; 5,2 – 6,0 mm; 6,0 – 6,8 mm | 55680142 |
| MS-326 | Mid span access tool 5,0 – 5,6 mm; 6,0 – 6,6 mm; 7,2 – 7,8 mm; 7,8 – 8,4 mm; 9,4 – 10,0 mm | 55680144 |
| VFL-25 | Laser visual fault locator | 55680146 |
| VFL-150 | Laser visual fault locator kit, incl. LC adapter | 55680148 |




55680150
FPM-50

| Item | Description | Order No. |
|---|---|-----------|
|  | Fiber power meter, 8 wavelengths 850 nm, 930 nm, 1300 nm, 1310 nm, 1490 nm, 1550 nm, 1625 nm, 1650 nm Range: -50 tot +26 dB | 55680150 |
|  | Fiber optic toolkit JIC-375, JIC-186, CST-1900, CSR-1575, FOD-2000, MS-6, SD-61, FL-2000, JIC-2288, JIC-842, FW-5, H90 | 55680160 |
|  | Fiber optic toolkit TK-120 plus VFL-150, FCC-250, FC-220 | 55680165 |
|  | Fiber optic toolkit TK-120 plus VFL-150, FCC-250, FCC-125 | 55680170 |
|  | LED lamp with zoom lens | 55680172 |

Subject to technical changes!



55680174
JIC-842

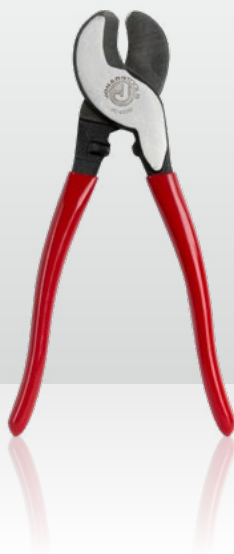

55680178
JIC-63050



55680180
MDC-14



| Item | Description | Order No. |
|------------------|--|-----------|
| JIC-842 | Telekom tongs | 55680174 |
| JIC-2288 | Side cutter | 55680176 |
| JIC-63050 | Cable cutter | 55680178 |
| MDC-14 | Tool for cutting micro tubes up to 14 mm | 55680180 |
| Speedpipe cutter | Brand: Gabocom | 55680182 |
| Spare blades | For speedpipe cutter, brand: Gabocom | 55680183 |
| H-90 | Toolbox | 55680185 |

Subject to technical changes!

Cleaning accessories



55680117
Connector cleaner FCC-300



55680107
TB-80875



55680113
FCC-125
(orange)

ITW cleaning cloths

- Fiber cleaning cloth made of 100 % dust free material for cleaning connectors and fibers
- Each cloth measures 10,2 x 10,2 cm
- 100 pcs in resealable box
- Product dimensions (W x H x D): 16 x 14,5 x 3 cm

Order No. **55680102**

Soaked cleaning cloths FSA50

- Cleaning cloths for splice preparation
- Soaked with special fiber cleaning fluid
- Each cloth measures 9 x 11 cm
- 50 pcs in resealable box
- Product dimensions (W x H x D): 7,5 x 12,5 x 3,5 cm

Order No. **55680201**

TB-80875 swab moistener

- Miller swab moistener PE
- Empty
- With metal flap

Order No. **55680107**

Sticklers™ fiber optic splice & connector cleaner

- Fast evaporating, no residue optical grade cleaning fluid for cleaning fiber
- Not regulated for transport by land, sea, or air
- Nonflammable, nontoxic
- Dissipates electrostatic charges
- ROHS and REACH compliant
- Minimum of 400 cleaning procedures per can

Order No. **55680104**

Fluid dispenser FD-220

The FD-220 fluid dispenser is designed to store and dispense cleaning fluids, such as isopropyl alcohol, to clean the end-faces of fiber optic cables. With a spill-proof lid, 220 ml capacity, and suction pump, this fluid dispenser is the most convenient way of carrying and dispensing cleaning fluid.

- Comes without fluid
- Twist-lock pump can be locked/unlocked with a simple twist
- Spill-proof lid holds fluid securely, preventing waste from spills and leaks
- Easy-to-use pump delivers a controllable amount of fluid with each press
- Dimensions (W x D x H): 62 x 62 x 117,6 mm

Order No. **55680220**

Quick-Click cleaner

The Jonard Quick-Click cleaner is designed for exceptional cleaning performance on the fiber optic connectors, the core of the fiber and the contact surface of the adapters or connectors of the fiber. The firmly attached dust cap provides optimal protection for the microfibers cloth as well as the adapter. This glass fiber cleaner has a patented 360° rotating cleaning concept for extra wide cleaning in just one step with different nozzles for each connector. In addition, this glass fiber cleaner contains a lint-free microfiber cloth and is made of electrostatically safe material.

| Item | Min. cleaning processes | Suitable for connectors | Order No. |
|------------------|-------------------------|-------------------------|-----------------|
| FCC-120 (white) | 500 | MPO | 55680111 |
| FCC-125 (orange) | 800 | LC | 55680113 |
| FCC-250 (blue) | 800 | FC, SC, ST | 55680115 |

Connector cleaner FCC-300

The Jonard Tools FCC-300 is an fiber optic connector cleaner with a brand new, nonwoven, synthetic cleaning cloth with great durability and improved reliability. This is strong enough for aggressive cleaning of large-scale contaminants on the optical fiber. More than 500 cleaning procedures are possible. The matching connectors are FC, SC, ST, LC and MU.

Order No. **55680117**

Fiber scraps disposal can FDC-66

The fiber scraps disposal can allows safe disposal of cleaved fiber ends. The twist cover locks scraps in the disposal can for safe and easy disposal. With a plastic top and bottom, the disposal can has a 60 ml capacity with a paperboard body and lightweight design to accommodate any tool kit or splice/connector station.

| Parameter | FDC-66 |
|-----------------|-----------------|
| Capacity [ml] | 60 |
| Dimensions [mm] | 47 x 47 x 66 |
| Weight [g] | 16,33 |
| Order No. | 55680066 |

MOBILE LABEL PRINTERS

Do you have questions concerning our products or want to place an order?

We look forward to your call!
+49 511 757086

Do you already know, which products you need?
shop.brauntelecom.com

BMP51

Mobile label printer with Bluetooth® interface



BMP51
Order No. on request

When you need clear, durable labels on the spot, you need the BMP™51 Label Maker. It offers crisp printing, easy formatting, convenient label sizes, and portability required for electrical and datacom installations, laboratory identification, facility and safety labelling.

- **Change Material in Seconds**
User-friendly, easy-to-insert cassettes include label material and ribbon
- **Automatic formatting of labels**
The cartridges make use of the Smart Cell technology that tells the printer how to format your label properly. Just insert a cassette, the printer does the rest.
- **Fast printing**
Prints at a speed of 25,4 mm/second - so you do not have to wait for your labels.

- **Long-lasting, integrated cutting device**
The printer has a self-cleaning cutting device that easily cuts any material and holds the label until you need it.
- **Power options to ensure mobility**
The device can be operated via the mains connection, AA batteries or the rechargeable Li-Ion battery. With one charge, you can print more than 3.000 labels.
- **Wireless use**
The integrated Bluetooth® technology enables wireless use.
- **Extensive software**
Thanks to the LabelMark™ software, the printer offers barcode symbols, time and date stamping, import of graphics, automatic data serialization and much more.

**A BMP51 will be configured for you individually.
Please contact us regarding an Order No.**



BMP61

Mobile label printer
with WiFi interface



BMP61
Order No. on request

Flexible and fast label printer

The BMP™61 Label Printer provides an efficient solution for quickly identifying your cables and other technical components. Heat shrinking sleeves, self-lams, wrap-around labels, optical fiber flags, tags and more than 600 other label materials provide the right solution for every application.

Rugged & reliable

- Drop-tested and equipped with moulded rubber bumpers
- Large material loading bay for fast label material swaps
- Smart-cell cartridge technology enables auto-calibration
- Large color touchscreen
- 33,8 mm/second print speed: Don't wait on the label you need
- Rechargeable NiMH-Battery for increased autonomy

High-performance materials, excellent print quality

- Handles die-cut, continuous and custom labels up to 50,8 mm – also in bulk format
- Intuitive typing thanks to the AZERTY/QWERTY/QWERTZ/CYRILLIC keyboards
- 300 dpi print quality

Data management versatility

- USB list feature: read spreadsheets directly from external USB-memory and integrate the data in your labels ready for printing
- Integrated WiFi interface – compatible with mobile apps: create or load label templates with your smartphone and send them to your printer
- USB 2.0 ports (Type A & B) to copy large lists of label designs
- Works with LabelMark™ labelling software and Brady mobile apps

A BMP61 will be configured for you individually.
Please contact us regarding an Order No.



Do you have questions concerning our products or want to place an order?

We look forward to your call!
+49 511 757086

Do you already know, which products you need?
shop.brauntelecom.com



